



Technical data Markoprint X1JET HP

System X1JET HP	Print	Basic	Advanced	Pro
maximum speed at 300 dpi	30 m per minute	30 m per minute	60 m per minute	90 m per minute
maximum resolution				
- horizontal	50 to 900 dpi	50 to 900 dpi	50 to 900 dpi	50 to 900 dpi
- vertical	300 dpi	300 dpi	300 / 600 dpi	300 / 600 dpi
Print/character height	0.8 bis 12.5 mm	0.8 bis 12.5 mm	0.8 bis 12.5 mm	0.8 bis 12.5 mm
maximum text length	1 000 mm	1 000 mm	1 000 mm	2 000 mm
No. of text memories	9 texts	9 texts	9 texts	9 texts
Text field	✓	✓	✓	✓
Counter	-	-	✓	✓
Date field/time	-	✓	✓	✓
Date offset	-	-	✓	✓
Action field	-	-	✓	✓
Logos	✓	✓	✓	✓
Barcodes	-	-	✓	✓
2D-Codes	-	-	-	✓
Data transfer by				
USB stick	✓	✓	✓	✓
Ethernet	✓	✓	✓	✓
Web interface	✓	✓	✓	✓
EIA-232	✓	✓	✓	✓
Internal sensor	✓	✓	✓	✓
External sensor	✓	✓	✓	✓
Encoder	✓	✓	✓	✓
I/O	2I / 40	2I / 40	2I / 40	2I / 40
Ink status display	LED	LED	LED	LED
Spitting	✓	✓	✓	✓
Warming	✓	✓	✓	✓
Printing examples in original size	Ab12	#092013648 12.08.2015		

Technical changes reserved.




Weber[®]
LABELING & CODING SOLUTIONS

Inkjet coder

Markoprint X1JET HP

Print
Basic
Advanced
Pro



Super compact thermal inkjet Coder (TIJ)

Markoprint X1JET HP is based on reliable Markoprint X4JET technology. This compact and powerful system is available in different, upgradable system versions. Markoprint X1JET HP is designed for different range of applications i.E. food & beverage, chemical, coated/uncoated materials, timber and the pharmaceutical industry. The small & compact integrated controller/printer comes in a single unit. The innovative system codes smooth absorbent and semi-absorbent surfaces - quickly, accurately and reliably.

- Innovative technology for printing information directly onto cartons
- High availability through cartridge technology, tested and proven a million of times
- High quality, high resolution printing

Easy to use

No training necessary: printing with the Markoprint X1JET HP is simple, due to 3-logic intuitive operation with LED status light. Data transmission is initialized with USB stick/interface.

- User friendly due to 3-logic
- Select and print directly 9 layouts/labels

Universal and flexible use

Markoprint X1JET HP uses True Type fonts for printing. All conventional 1- and 2-dimensional codes* can be printed. The controller is fully integrated into the print module.

- Highly compact design (see also picture in original size)
- Simple integration into packaging systems and conveyors for printing from the side or top
- No separate photo sensor required for triggering/initializing the printing process - Built in photo sensor already in the system unit (external signal input optional)
- Printing height up to 12.5 mm

Control

Different performing system versions are available, with different functional features, depending on application requirements: Print, Basic, Advanced and Pro.

The system X1JET HP allows data transmission via USB stick. Each controller has a network connection (LAN) or a standard EIA-232 interface. Print layouts are created with iDesign software.

- Data transfer using USB stick
- Data transfer connecting Ethernet and EIA-232
- Data transfer connecting to Options interface (printing communication from PLC or external photosensor)
- Data transfer enabling Web interface


Wide range of standard accessories

- Rotary/Shaft encoders, for different dynamically adapting conveyor speeds
- Flexible bracket for varying product
- Mounting brackets for use horizontally and vertically

Wide ink range

A wide range of water- and solvent-based inks to work with many applications. Paper, cartons, coated surfaces, foils, plastics etc. are coded permanently, with excellent resolution. Ultimate flexibility only available with cartridge based coding systems.

*depending on version

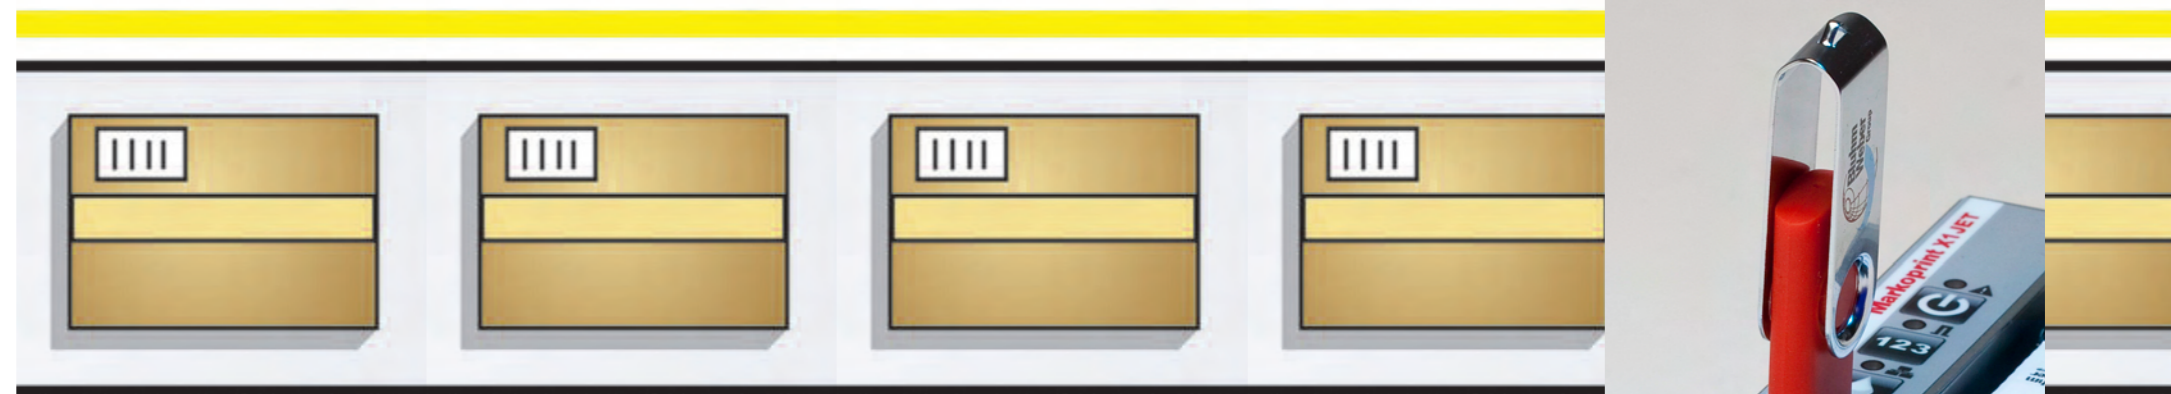

Markoprint X1JET HP

Compact, independently operating printhead for simple integration into existing production lines.



3-Logic User Interface

LED indicators for intuitive use




Maintenance-free HP cartridge


Perfect print quality - High reliable inks with up to 15 hours decap



Picture of original size!

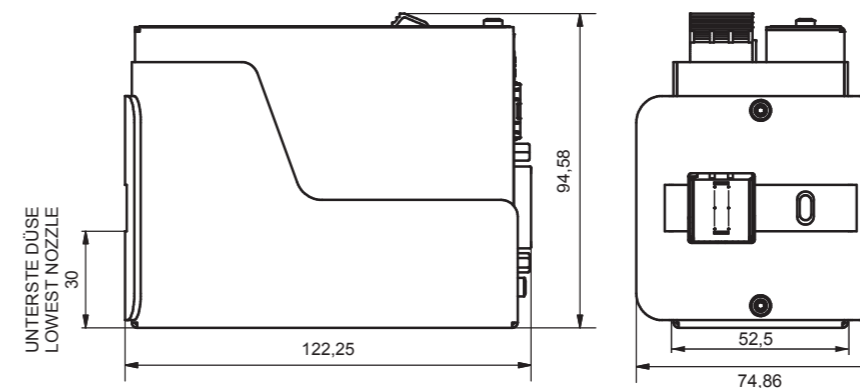


Dimension drawing technical data

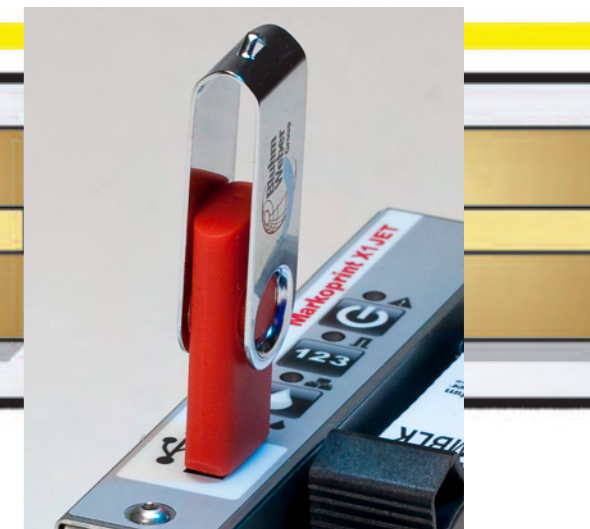

USB stick data transfer

Dynamically transfers Data created with a PC to the printer

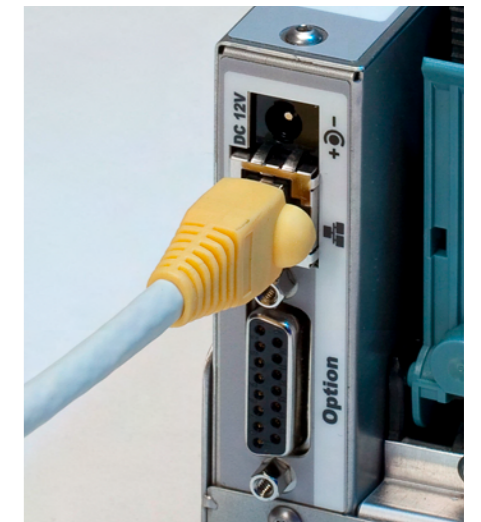

Ethernet

Data transfer from networks and Web interface



Interface options

Direct Connection of rotary encoder, sensor and status outputs